



imageRUNNER
C3025i

Color A3 all-in-one for business that demand productivity, quality and value.

A color A3 multifunctional that's easy to use and designed to help limit the administrative costs related to printing – a complete end-to-end document workflow solution for any office.



*Shown with optional accessories

Quality from Canon

The imageRUNNER C3025i is a color A3 multifunctional offering up to 25 (BW, CL, LTR) pages per minute print speed and thanks to key technologies it can become a valuable asset to any working environment all in a compact freestanding offering. Canon's V² (Vivid & Vibrant) imaging technology helps provide documents that truly stand out results and the responsive 5 inch (12.7 cm) color touch interface delivers a quick and easy user experience. Thanks to mobile printing and scanning capabilities including Apple AirPrint™ and Mopria printing it not only supports new ways of working but promotes it.

Control the total cost of print

Easy device management is designed to help limit administrative costs for IT teams thanks to less time and effort needed to maintain the device, with automated meter collection, consumables management and remote diagnostics. Thanks to embedded support for Canon's optional uniFLOW software the imageRUNNER C3025i can easily integrate as part of a larger fleet, letting you track and charge individual print jobs to people, locations, departments and projects, as well as providing per-user reports.

Fits any office environment


The imageRUNNER C3025i's size and power make it a small but mighty document solution outstanding for small workgroups within organizations of any size. Workflow integration, productivity and the option of 3-in-1 staple finishing are all available within the device's compact freestanding footprint, while adding the device to existing ecosystems is made simple with support for optional PCL and Genuine Adobe PS. Security features a priority in any modern working environment, help limit access to your information with Secure Print, pin release and PDF password protection, plus optional uniFLOW can add further levels of security around your information.

Configuration



INNER 2WAY TRAY-J1*

- Separates copies, prints and faxes
- Adds a second internal output tray

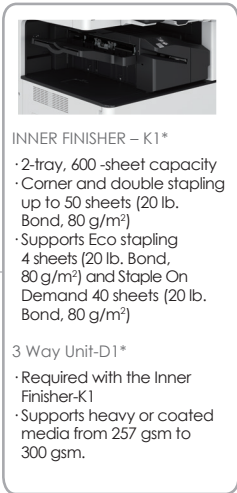

INNER FINISHER - K1*

- 2-tray, 600-sheet capacity
- Corner and double stapling up to 50 sheets (20 lb. Bond, 80 g/m²)
- Supports Eco stapling 4 sheets (20 lb. Bond, 80 g/m²) and Staple On Demand 40 sheets (20 lb. Bond, 80 g/m²)

3 Way Unit-D1*

- Required with the Inner Finisher-K1
- Supports heavy or coated media from 257 gsm to 300 gsm.



iR C3025i



UTILITY TRAY-B1*



COPY TRAY-J2*



INNER SHIFT SORTER-A1*

- Separates each printout group by shifting in alternating layers
- Output capacity of 250 sheets



CASSETTE FEEDING UNIT-AP1*

- Supports up to 12" x 18", A3
- Media weight 14 lb. Bond to 80 lb. Cover, 52 to 220 g/m²
- 2 x 550 sheets (20 lb. Bond, 80 g/m²)

* Accessories are optional

Main Unit

Type

Color Laser Multifunctional

Core functions

Print, Copy, Scan, Send and Optional Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

12.7 cm (5 inch) TFT LCD WVGA Color Touch panel

Memory

Standard: 2.0GB RAM

Interface Connection

NETWORK

Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n);
Optional: NFC

OTHERS

Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1;
Optional: Copy Control Interface

Paper Capacity (A4, 80g/m²) (LTR, 20 lb. Bond)

Standard: 1,200 Sheets
Maximum: 2,300 Sheets

Paper Sources (A4, 80g/m²) (LTR, 20 lb. Bond)

Standard: Two 550-sheet paper cassettes
100-sheets Multi Purpose Tray
Optional: Dual 550-sheet paper cassettes (CASSETTE FEEDING UNIT-AP1)
Maximum: 2,300 Sheets

Paper Output Capacity (A4, 80g/m²) (LTR, 20 lb. Bond)

Standard: 250 Sheets
With Inner Finisher: 600 sheets *INNER FINISHER-K1 / COPY TRAY-J2

Finishing capabilities

Standard: Collate, Group
With Inner Finisher: Collate, Group, Offset, Staple, Staple-Free Staple, Staple On Demand

Supported media types

Cassette 1,2: Thin, Plain, Thick, Color, Recycled, Pre-punched, Transparency, Bond, Envelope
Stack Bypass: Thin, Plain, Thick, Color, Recycled, Pre-punched, Transparency, Tracing, Label, Bond, Coated, Envelope
Cassettes 3/4 (CASSETTE FEEDING UNIT-AP1): Thin, Plain, Recycled, Thick, Color, Transparency, Bond, Pre-punched

Supported media sizes

Cassette 1
Standard Size: Letter, Executive, Statement-R, A4, B5, A5R

Envelopes: No.10 (COM10), ISO-C5, DL
Custom Size: 5-1/2" x 7-1/8" to 11-3/4" x 8-1/2" (139.7 mm x 182 mm to 297 mm x 215.9 mm)

Cassette 2

Standard Size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, A3, B4, A4, B5, A4R, A5R

Envelopes: No.10 (COM10), Monarch, DL

Custom Size: 5-1/2" x 7-1/8" to 12" x 18" (139.7 mm x 182 mm to 304.8 x 457.2 mm)

Cassette 3/4 (CASSETTES FEEDING UNIT-AP1)

Standard Size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, A3, B4, A4, A4R, B5R, B5, A5R

Custom Size: 5-1/2" x 7-1/8" to 12" x 18" (139.7 mm x 182 mm to 304.8 mm x 457.2 mm)

Stack Bypass

Standard Size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement, Statement-R, A3, B4, A4, A4R, B5R, B5, A5, A5R, SRA3

Custom size: 3-7/8" x 5-1/2" to 12-5/8" x 18" (98.4 mm x 139.7 mm to 320 mm x 457.2 mm)

Envelopes: No.10 (COM10), Monarch, ISO-C5, DL

Supported Media Weights

Cassette 1,2: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Cassette Feeding Unit: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Stack Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)
Duplex: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Warm-up Time

From Power On: Approx. 30 Seconds or Less *1
From Sleep Mode: Approx. 10 Seconds or Less

Dimensions (W x D x H)

DADF: 22-1/4" x 26-1/8" x 34-5/8" (565 mm x 664 mm x 880 mm)

Installation Space (W x D)

Basic: 38-1/2" x 44" (978 mm x 1,117 mm) (when attach with DADF + Stack Bypass extension extended + Cassette open)
Fully Configured: 43-3/4" x 44" (1,110 mm x 1,117 mm) (when attach with INNER FINISHER-K1 + Stack Bypass extension extended + Cassette open)

Weight

Approx. 151.7 lb (68.8 kg) including toner

Print Specifications

Printing method

Color Laser Beam Printing

Print Speed (BW/CL)

Up to 25 ppm (Letter/A4), 15 ppm (Legal/11" x 17"/A3)

Print Resolution

Engine resolution: 600dpi x 600dpi, 1200dpi x 1200dpi
Laser resolution: 9600dpi equivalent x 600dpi (600dpi mode) / 1200dpi x 1200dpi (1200dpi mode)

Page description languages

UFR II, PCL 6, Adobe PS3 (Standard)

Double Sided Printing

Automatic (Standard)

Direct Print

Direct printing available from USB memory key

Supported file types: TIFF, JPEG, PDF and XPS*.
*XPS is supported from LPR command print.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Barcode fonts*
*Requires optional BARCODE PRINTING KIT-D1

PS fonts: 136 Roman

Operating System

UFR II: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7.5 or later), Linux

PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016

PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7.5 or later)

PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 10

Copy Specifications

Copy Speed (BW/CL)

25 ppm (Letter/A4), 15 ppm (Legal/11" x 17"/A3)

First-Copy-Out Time* (LTR, A4) (BW/CL)

Approx. 5.9/8.2 seconds or less
*20 °C to 30 °C Environment

Copy resolution

Reading: 600 dpi x 600 dpi

Multiple Copies

Up to 999 copies

Copy Exposure

Automatic or Manual (Inch 9 Levels, A/B 11 Levels)

Magnification

25% - 400% (1% Increments)

Scan Specifications

Type

Color Platen and Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

100 Sheets (20lb. Bond, 80g/m²)

Document Feeder Supported media sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, A3, B4, A4R, A4, B5R, B5, A5R, A5, B6

Document Feeder Supported Media Weight

Document Feeder media weight :

1-sided scanning: 13 lb. Bond to 34 lb. Bond (50 to 128 g/m²) (BW, inch)

1-sided scanning: 10 lb. Bond to 34 lb. Bond (38 to 128 g/m²) (BW, AB)

1-sided scanning: 17 lb. Bond to 34 lb. Bond (64 to 128 g/m²) (CL, inch and AB)

2-sided scanning: 13 lb. Bond to 34 lb. Bond (50 to 128 g/m²) (BW)

2-sided scanning: 17 lb. Bond to 34 lb. Bond (64 to 128 g/m²) (CL)

Pull Scan Specifications

Color Network ScanGear2. For both TWAIN and WIA

Supported OS: Windows Vista/7/8/8.1/10

Scan Resolution

204 x 196 dpi, 300 x 300 dpi

Platen Acceptable Originals

Platen media size: Sheet, Book, 3-Dimensional Objects (Up to 2kg)

Paper size: 11" x 17", Legal, Letter, Letter-R, Statement, A3, B4, A4R, A4, B5R, B5, A5R, A5, B6

Scan Speed (LTR, A4)

Single-sided Scanning (BW): 55 ipm (300pi) / 30 ipm (600 dpi)

Single-sided Scanning (Color): 55 ipm (300pi) / 30 ipm (600 dpi)

Double-sided Scanning (BW): 27.5 ipm (300pi) / 15 ipm (600 dpi)

Double-sided Scanning (Color): 27.5 ipm (300pi) / 15 ipm (600 dpi)

Send Specifications

Destination

E-mail/Internet FAX (SMTP), SMB, FTP, Super G3 FAX (Optional)

Address Book

LDAP (50)/Local (300)/Speed dial (281)

Send resolution

204 x 196 dpi, 300 x 300 dpi

Communication protocol

File: FTP, SMB v3.0

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple)

File Format

Standard: TIFF, JPEG, PDF (Compact, Searchable)

Optional: PDF (Encrypted, Digital Signature)

Fax Specifications

Maximum Number of Connection Lines

1

Modem Speed

Super G3: 33.6 kbps

G3: 14.4 kbps

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size

11" x 17", Legal, Letter, Statement-R, A3, B4, A4, A4R, B5*, B5R**, A5**, A5R**

*sent as B4

**sent as A4

FAX memory

Up to 512 pages

Speed dials

Max. 281

Group dials/Destinations

Max. 299 dials

Sequential Broadcast

Max. 310 addresses

Memory Backup

Yes

Security Specifications

Authentication

Standard: Department ID Authentication, Embedded Universal Login Manager

Environmental Specifications

Operating Environment

Temperature: 10 to 30 °C (50 to 86 °F)

Humidity: 20 to 80 % RH (no condensation)

Power source

120-127V, 60Hz, 7.5A

220-240V, 50/60Hz, 4.0A

Plug (Main Unit)

NEMA 5-15P (120V)

CEE7/7 (230V)

Power consumption

Maximum: Approx. 1.5 kW

Standby: Approx. 31.0 Wh (120V), 33.6 Wh (230V) *Reference Value

Sleep mode: Approx. 2 W (Wireless LAN power save mode: OFF), 1 W (Wireless LAN power save mode: ON)

Plugin Off: Approx. 0.1 W

Software and Printer Management

Remote management tools

iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management)

eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)

Scanning software

ScanGear MF: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device

Optimization tools

Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers (Available via service only)

Document Publishing

IW Desktop: Powerful print publishing software which combines documents from different sources and file formats, applies finishing with preview and templates to help create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorization

Consumables

Toner Cartridge/s

GPR-53 TONER BK/C/M/Y

Toner (Estimated Yield @ 5% Coverage)

GPR-53 Black: 36,000 Images

GPR-53 Color (C,M,Y): 19,000 Images

GPR-53L Color (C,M,Y): 8,500 images

Paper Supply Options

CASSETTE FEEDING UNIT-AP1

Paper Capacity: 550 Sheets x 2 Cassettes (20lb. Bond (80 g/m²))

Paper Size: 12"x18", 11"x17", Legal, Letter, Letter-R, Executive, Statement-R, A3, B4, A4, A4R, B5R, B5, A5R

Custom Size: 5-1/2" x 7-1/8" to 12" x 18" (139.7 x 182.0 to 304.8 x 457.2 mm)

Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Power Source: From the Main Unit

Dimensions (W x D x H): 22-1/4" x 24-1/4" x 9-3/4" (565 mm x 615 mm x 248 mm)

Weight: Approx. 35.3 lb. (16 kg)

Output options

INNER 2WAY TRAY-J1

Number of Trays: 2

Total Output Capacity: Upper Tray 100 sheets

Lower Tray 250 sheets

Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Paper Size:	12"x18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement, Statement-R, SRA3, A3, B4, A4, B5, A5, A4R, B5R, A5R, Custom Size 3-7/8" x 5-1/2" to 12-5/8" x 18" (98.4mm x 139.7mm-320mm x 457.2mm)
Dimensions* (W x D x H):	Envelope (No.10(COM10), Monarch, DL, ISO-C5) 16-7/8" x 16" x 3" (427 mm x 407 mm x 76 mm) *When attached with the Main Unit
Weight:	Approx. 1.3 lb (0.6 kg)
INNER SHIFT SORTER-A1	
Number of Trays:	1
Total Output Capacity:	Letter/Executive/A4/B5 250 sheets 12"x18"/11"x17"/Legal/Letter-R/Statement/Statement-R/SRA3/A3/B4/A4R/A5/A5R/B5R: 125 sheets 14 lb. Bond to 110 lb. Cover (52 to 300 g/m ²) 21-1/4" x 20-5/8" x 4-1/2" (538 mm x 523 mm x 114 mm) *When the extension tray is extended
Paper Weight:	14 lb. Bond to 110 lb. Cover (52 to 300 g/m ²)
Dimensions* (W x D x H):	21-1/4" x 20-5/8" x 4-1/2" (538 mm x 523 mm x 114 mm) *When the extension tray is extended
Weight:	Approx. 6.6 lb (3.0 kg)
INNER FINISHER-K1 (Internal)	
Number of Trays:	2
Top Tray: Capacity:	Letter, Statement, Statement-R, Executive, A4, B5, A5, A5R 100 sheets, 12"x18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R 50 sheets
Lower Tray: Capacity:	Letter, Statement, Statement-R, Executive, A4, B5, A5, A5R 500 sheets, 12"x18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 250 sheets
Paper Weight:	14 lb. Bond to 110 lb. Cover (52 to 300 g/m ²)
Staple Position:	Corner, Double
Staple Capacity:	Letter/Executive/A4/B5: 50 sheets (14 to 24 lb. Bond (52 to 90 g/m ²)) 11" x 17"/Legal/Letter-R/A3/B4/A4R: 30 sheets (14 to 24 lb. Bond (52 to 90 g/m ²)) 11"x17"/Letter/A3/A4/B4/B5: 5 sheets (14 to 17 lb. Bond (52 to 64 g/m ²)) 4 sheets (17.3 to 21.7 lb Bond (65 to 81.4 g/m ²)) 3 sheets (21.7 to 28 lb Bond (81.5 to 105 g/m ²)) 40 sheets (20 lb. Bond (80 g/m ²)) 23-3/4" x 20-5/8" x 7-3/8" (604 mm x 525 mm x 188 mm) *With the tray extension extended.
Staple-Free Staple:	11"x17"/Letter/A3/A4/B4/B5: 5 sheets (14 to 17 lb. Bond (52 to 64 g/m ²)) 4 sheets (17.3 to 21.7 lb Bond (65 to 81.4 g/m ²)) 3 sheets (21.7 to 28 lb Bond (81.5 to 105 g/m ²)) 40 sheets (20 lb. Bond (80 g/m ²)) 23-3/4" x 20-5/8" x 7-3/8" (604 mm x 525 mm x 188 mm) *With the tray extension extended.
Staple On Demand:	40 sheets (20 lb. Bond (80 g/m ²))
Dimensions* (W x D x H):	23-3/4" x 20-5/8" x 7-3/8" (604 mm x 525 mm x 188 mm) *With the tray extension extended.
Weight:	Approx. 17.6 lb (8 kg)

Hardware Accessories

CARD READERS

MiCardPlus for ULM - A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indala and MiFare etc.). Integrates with Universal Login Manager and uniFLOW
Copy Card Reader-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW)
Copy Card Reader Attachment-H2 - Attachment kit for Copy Card Reader-F1 only.

OTHERS

Copy Tray-J2 - Provides a simple tray for basic output needs.
Utility Tray-B1 - Additional tray to hold an external USB keyboard.
3 Way Unit-D1 - is required with the Inner Finisher-K1 if heavy or coated media needed from 257 g/m² to 300 g/m².

System and Controller options

SEND OPTIONS

Send PDF Security Feature Set-E1 - Enables the user to send Encrypted PDFs as well as add digital device signatures to a PDF which help identify the device from which the document was sent through invisible and/or visible digital signatures.

BARCODE PRINTING

Barcode Printing Kit-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.

SYSTEM ACCESSORIES

Copy Control Interface Kit-D1:
Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's imageRUNNER C3025i.
NFC Kit-D1 - NFC Control Panel is optional kit enabling the communication between main unit and other devices using NFC.

FAX ACCESSORIES

Super G3 Fax Board-AV1 - Adds fax functionality.

Other Options

ACCESSIBILITY ACCESSORIES

ADF Access Handle-A1 - Attaches to the document feeder, making access easier for seated users.

STAPLE CARTRIDGE

Staple-P1 - For stapling (2 x 5,000 pcs)

Footnotes

[1]

Time from device power-on until 1st print output completes, minus FCOT

AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, MEAP, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. uniFLOW is a registered trademark of NT-ware Systemprogrammierung GmbH. Adobe® and PostScript® 3™ are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. PCL® is a registered trademark of Hewlett-Packard Company. All other referenced product names and marks are trademarks of their respective owners. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance.

[IF APPLICABLE] Some security features may impact functionality/performance; you may want to test these settings in your environment.

©2017 Canon U.S.A., Inc. All rights reserved.

0207W584



Canon

Canon U.S.A., Inc. - Latin America Group
One Canon Park
Melville, NY 11747
U.S.A.

http://www.cla.canon.com/Color_imageRUNNER

CANON
GENUINE
TONER, CARTRIDGE
& PARTS

